

HANDALL^{T.M.}


INSTALLATION PROCEDURE

If you have any problems, do not hesitate to call us.


HOGUE GRIPS
POST OFFICE BOX 1138
PASO ROBLES, CA 93447
(805) 239-1440

REV. 8/95

1. Before starting work, make sure the gun is unloaded and made safe with magazine removed.

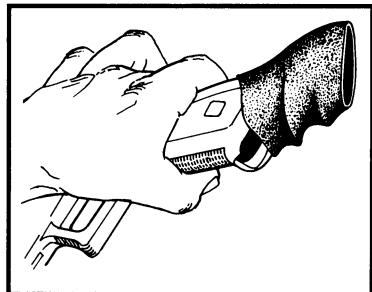


2. Start by holding the gun as shown. At the rear-most corner, cover the frame with the HANDALL. Make sure it is right side up. Look for the (UP ↑) inside the grip. Note: You may want to warm the HANDALL if the environment is cold, for example, for ease of installation. This, can be done in hot or even boiled water, or with a blow dryer, etc. and warming will make the HANDALL easier to stretch. On steel frame guns make sure the sleeve is completely dry and the gun is protected against rust.

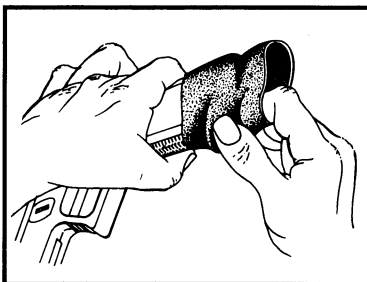

3. Next pull the sleeve towards the front of the gun until the finger groove ridge is over the front corner of the frame. The HANDALL is designed to fit very tight and much force may be required to complete this step. The sleeve should be stretched as evenly as possible. The rubber is very durable and tear resistant although care must be exercised not to gouge, cut, or pull excessively on the edges of the sleeve as a tear may develop. Be careful of the sharp plastic edges found around the magazine well of Glock pistols.


ATTENTION

This Hogue Grip Sleeve is designed to be used with standard Glock semi-automatic pistols or other pistols of similar size and function. **DO NOT INSTALL THIS SLEEVE** on pistols with grip safeties or functions. **FOR EXAMPLE:** It should not be used on a Colt 1911 style pistol as it will disable the grip safety mechanism.

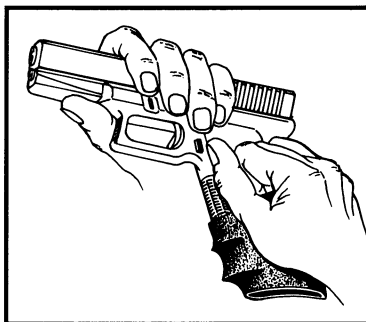

4. The grip must be pulled onto the gun frame. Slip your fingers under the sleeve and grab the edge. Pull upwards onto the gun. Do not pull outwards any more than necessary. Do this a little at a time alternating from right to left, back and forth, inside and out, whatever it takes until the grip is to its desired height.

6. Trimming

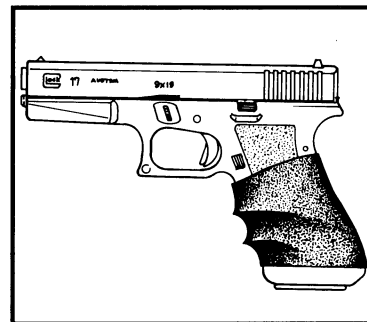

5. The HANDALL is designed to fit standard Glock pistols as shown. It may be raised or lowered slightly to fit most comfortably in your hand.

6. The bottom edge of the HANDALL will fit parallel to the bottom of standard Glock pistols, but may be uneven or too long on other makes of guns. This can be remedied by trimming the bottom with a hobby knife. A thin piece of clear plastic from the package inserted between the gun and sleeve will prevent scratching the gun and will allow you to see where you are cutting.

IMPORTANT !

Check all functions of your gun after grips are installed. **Test fire your gun.** This is especially important if weapon is to be used for law enforcement duty.

HOGUE® is a registered trademark of Hogue Combat Grips, Inc.